

LANESHARK.COM

MADE IN THE
USA 

LaneShark




LaneShark

LANE SHARK COMPATIBILITY

FOLLOW THIS FLOW CHART TO DETERMINE WHAT UNIT IS BEST FOR YOU AND WHAT YOU NEED TO HOOK IT UP TO YOUR TRACTOR

FIRST THING'S FIRST IS YOUR TRACTOR COMPATIBLE?

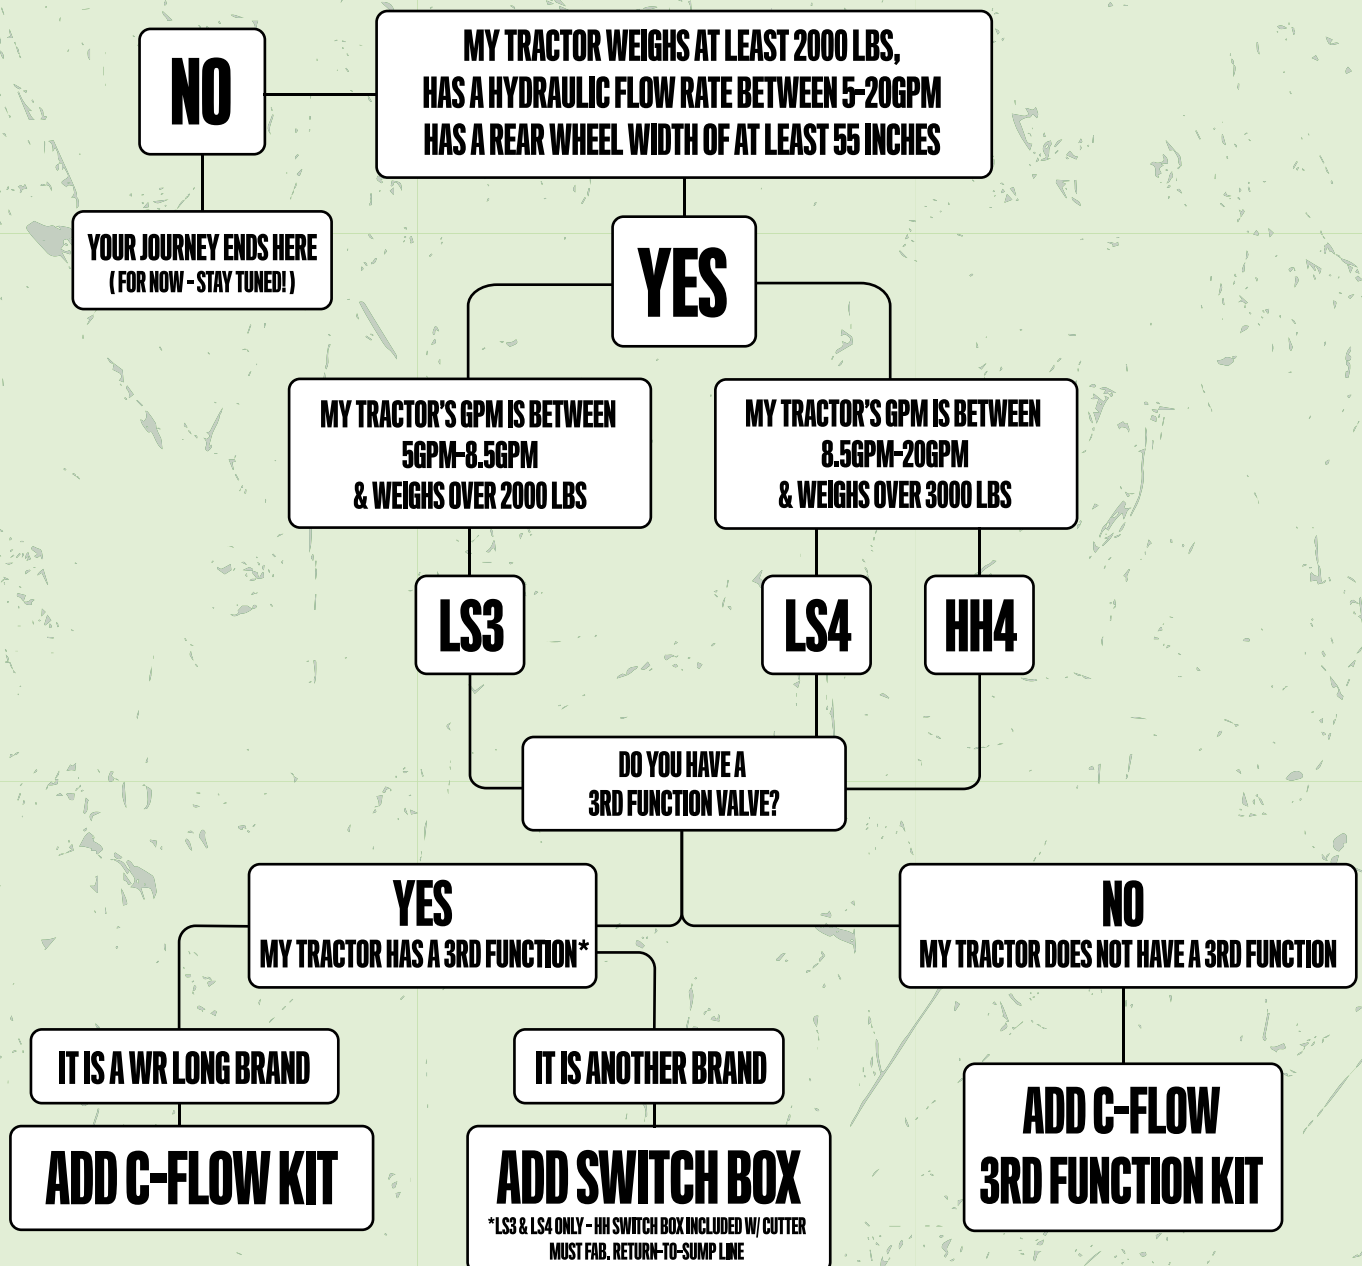

*Must be an electronic 3rd function. Lane Sharks are not compatible with diverter valves.

THE ALL NEW

HAMMERHEAD



Our first hydraulically articulating unit lets you change cutting positions without leaving the seat of your tractor, saving you time and making your work load easier than ever before. Each Hammerhead comes with a set of whips, hose guard, and Hammerhead Switch Box, and pairs perfectly with our W.R. Long C-Flow 3rd Function Kit.

Get ready to level up your land management game!

HAMMERHEAD

NOT COMPATIBLE WITH SKID-STEERS

HH4



FULL RANGE OF MOTION

OVERVIEW

The HH4 is our 4 foot hydraulically articulating model. Best for large to mid size tractors. No more leaving your operating station to change positions on your Lane Shark. Fully adjustable and controlled by the Hammerhead Switch Box in tandem with your 3rd function. **MUST BE USED WITH 3RD FUNCTION. REAR REMOTES NOT COMPATIBLE.** Everything you need to tie directly into a C-Flow Third Function kit, including whips, check valve, hose guard, and the Hammerhead Switch Box is included. Non-WR Long third functions require a return-to-sump line be fabricated. Compatible with PTO Power Packs (sold separately).

HYDRAULIC FLOW RATE: SMALL MOTOR	N/A
HYDRAULIC FLOW RATE: STANDARD MOTOR	8.5-20 GPM
WEIGHT	550LBS
DIMENSIONS	42" Lx48"Wx29"H
CUTTING DIAMETER	44"
CUTTING CAPACITY	2-3"
CUTTING POSITIONS	Variable
DECK CONSTRUCTION	3/16" Plate Steel Reinforced with 1/4" steel
BLADES	2, Double Sided
LOADER COMPATIBILITY	SSQA, JD Hook & Pin, Global/Euro (Adapter Required; Sold Separately)
MINIMUM REQUIRED TRACTOR WEIGHT	3,000lbs
MINIMUM REQUIRED TRACTOR WIDTH	55" rear wheel width

DETAILS & BENEFITS

- Engineered for lower flow hydraulic systems than those on skid steers.
- An affordable solution for cutting overgrown road sides, fence lines, maintaining trails, plantations, hunting lanes, and more.
- Easily cuts 2-3" saplings, underbrush, and limbs on road sides, fence lines, around ponds and in tight spots.
- American made using American parts and labor.
- Compatible with hundreds of tractor models, including John Deere 5 series and larger, and Kubota M Series, and MX Series.
- Safely and efficiently run off of your tractor's 3rd function

WARRANTY

Hammerheads's include a 1 year limited warranty.

LANE SHARK

We have changed the game when it comes to clearing overgrown vegetation. No more costly skid-steer setups or large inconvenient boom mowers. Lane Shark is the first affordable solution to reclaim your property, while saving you time and back-breaking labor. With cutting angles ranging from 0° - 90°, the Lane Shark is able to eliminate encroaching overgrowth along a wide variety of flat and sloped terrain alike.

Compatible with C- Flow 3rd Functions, most electronic 3rd Functions (must fabricate a return to sump line), or PTO Power Packs (sold separately). Some rear remotes are compatible but not recommended.

LS4



The LS4 is our 4 foot manual model. Best for mid-size to large tractors.

LS3



The LS3 is our 3 foot manual model. Best for compact to small tractors.

MODEL COMPARISON

HYDRAULIC FLOW RATE: GEAR MOTOR

HYDRAULIC FLOW RATE: STANDARD H SERIES MOTOR

HYDRAULIC FLOW RATE: HIGH CAPACITY H SERIES MOTOR

WEIGHT

DIMENSIONS

CUTTING DIAMETER

CUTTING CAPACITY

CUTTING POSITIONS

DECK CONSTRUCTION

BLADES

LOADER COMPATIBILITY

MINIMUM REQUIRED TRACTOR WEIGHT

MINIMUM REQUIRED TRACTOR WIDTH

LS4

N/A

8.5-15 GPM

15-20 GPM

450LBS

42"Lx48"Wx29"H

44"

2-3"

60+

3/16" Plate Steel

2, Double Sided

SSQA, JD Hook & Pin,

Global/Euro (Adapter Required)

3,000lbs

55" rear wheel width

LS3

5-8.5 GPM

8.5-15 GPM

N/A

320LBS

34"Lx34"Wx29"H

32"

2-3"

40+

3/16" Plate Steel

2, Double Sided

SSQA, JD Hook & Pin,

Global/Euro (Adapter Required)

2,000lbs

55" rear wheel width

DETAILS & BENEFITS

Lane Shark's include a 1 year limited warranty.

- Engineered for lower flow hydraulic systems than those on skid steers.
- An affordable solution for cutting overgrown road sides, fence lines, maintaining trails, hunting lanes, and more.
- Easily cuts 2-3" saplings, underbrush, and limbs on road sides, fence lines, around ponds and in tight spots.
- American made using American parts and labor.
- John Deere 1 and 2 Series, Kubota B and LX Series not compatible.

NOT COMPATIBLE WITH SKID-STEERS

CONTACT US

SALES@LANESHARKUSA.COM
LANESHARKUSA.COM
850.610.2870



Vertical 90° Extended

LS3 + LS4 ONLY



Vertical Positive 45°



Vertical Positive 25°



Vertical



Vertical Negative 35°



Vertical Negative 45°



Offset Positive 45°



Offset Positive 25°



Offset



Offset Negative 35°



Offset Negative 45°

FEATURES

- Multiple Cutting Positions: 0° level with the cutting deck directly in front or to the right side of the tractor, 25° - 45° angle positions great for reaching ditches, pond edges, slopes, and vertical position perfect for creating hunting lanes, maintaining roads, clearing tree plantation rows, and reclaiming property boundaries.
- Two-sided Blades: Allows for cleaner cuts and extends blade life span. Easy to remove and flip to keep cutting.
- Deck Construction: Cutting deck is constructed of 3/16" plate and 1/4" plate reinforcement for the spindle and motor mount. Additional reinforcement using 1/4" angle iron throughout.
- Heavy Duty 5/16" Skid Steer Plate: Each skid steer plate is built from 5/16" plate steel using our CNC Plasma Table.
- Off-set Cutting Position: Add 44 inches to cut width when coupled with a rear PTO brush cutter.
- Open Front Design: Blades protrude 2" from the center of the deck allowing for a closer cut and easier access to dense brush.
- Dual Integrated Mounting Systems:
 - Skid Steer Quick Attach
 - John Deere Quick Attach: 400 & 500 Series Hook and Pin style loaders**A quick attach adapter is required to accommodate the tractors equipped with a John Deere™ Global/Euro quick connect system. (Item purchased separately.)

COMPATIBILITY

Most midsize tractors with SSQA or John Deere Hook and Pin systems and proper auxiliary flow. (Minimum 5 GPM) Must have a third function with or without a C-Flow Kit. **Not compatible with skid steers. Not compatible with diverter valves or stacked valve third functions - you will lose loader priority. Must exchange for WR Long C-Flow Third Function.** To ensure total compatibility with your tractor, please contact us for more information.

HYDRAULIC KITS


Plumbing your Lane Shark is easier than ever with our C-Flow (Continuous Flow) Kits. The Lane Shark "C-Flow 3rd Function" is a full 3rd function kit with the ability to also have continuous flow capability for operating the Lane Shark.

The "C-Flow Kit" can be added to any already installed W.R. Long 3rd Function.

Both kits include a Lane Shark switch handle, prefabricated whips with quick connect fittings, and a bulkhead mount fully customized to fit your specific tractor make, model, and loader.

All C-Flow kits for the Hammerhead will partially ship pre-assembled with the Hammerhead cutter

C-FLOW 3RD FUNCTION

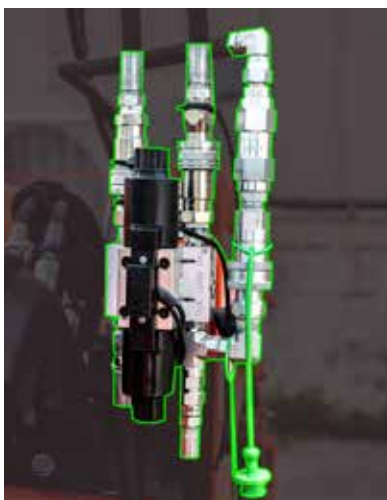


Pre-Assembled to include a  3rd function and our proprietary continuous flow kit

SCAN FOR VIDEO



C-FLOW KIT

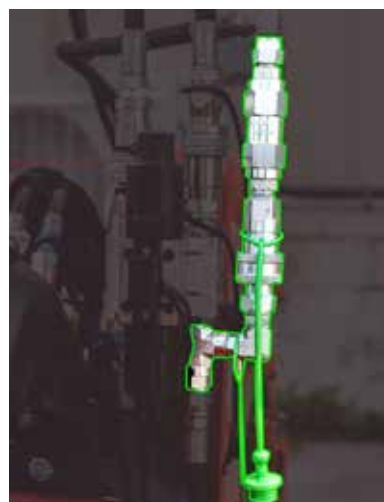

 LaneShark Continuous flow kit can be added on to an existing WR Long 3rd Function

LANE SHARK SWITCH BOX

COMPATIBLE WITH NON-WR LONG BRAND 3RD FUNCTIONS

The Lane Shark Switch Box provides the operator with push button control of the Lane Shark without having to hold down the button on your third function. It functions by keeping your hydraulic line open for consistent pressure to your cutter. No more holding down your toggle switch for continuous flow! Each switch is designed for simple installation, and in most cases, utilizes the tractor's seat safety switch to shut off hydraulic flow should the operator leave the seat.

****Ensure case drain port is accessible for return line****



CONTACT US

SALES@LANESHARKUSA.COM
LANESHARKUSA.COM
850.610.2870

C-FLOW KITS

C-FLOW 3RD FUNCTION FULL KIT



C-FLOW ADDITION KIT



DETAILS & BENEFITS

- Engineered for tractors with either an existing WR Long third function or in need of third function hydraulics for continuous flow functionality.
- Designed strictly for WR Long third functions.
- An affordable solution for getting your tractor Lane Shark and grapple ready.
- Each kit includes prefabricated whips with a bulk-head mount and quick connect fittings, so you can exchange your attachments in one simple step.
- Optional Switch Box substitute instead of Switch Handle

THE NEW STANDARD



**TRIPLE CLICK
TO ACTIVATE**

**SINGLE CLICK
TO DEACTIVATE**

1. C-FLOW COMPONENT

Specialized assembly that connects to your WR Long third function in order to allow for continuous hydraulic flow. This will come pre-installed on a WR Long third function valve, or ready for you to install on your pre-existing WR Long 3rd function. This can be customized to fit MOST tractor makes, models, and loaders that can operate a Lane Shark cutter.

2. LS SWITCH HANDLE

Lane Shark Switch Handle provides the operator with push button control of the Lane Shark without having to hold down a button on your third function. Each switch is designed for simple installation, and in most cases utilizes the tractor's seat safety switch to shut off hydraulic flow should the operator leave the seat. Tap the Lane Shark button 3 times to power on, once to power off.

3. BULKHEAD MOUNT

Mounts near the torque tube and comes with quick connect fittings to work in tandem with your Lane Shark to connect and disconnect hydraulic hoses with ease.

4. WHIPS, CHECK VALVE, & QUICK CONNECT FITTINGS

These hoses come with quick connect fittings and a check valve to maintain continuous hydraulic pressure.

Lane Shark C-Flow and WR Long third function valves include a 1 year limited warranty. Electrical components include a 90 day limited warranty. Hoses include a 30 day limited warranty.